
Machine mixing is useful in large works. It is cheaper in the long run. The mixing is done in concrete mixer either of tilting drum type or non-tilting drum type. Water should be added in the mixer at the same time or before the other materials are placed. The mixing time should be at least one minute and preferably two minutes. The concrete discharged from the mixer should be consumed before the setting time starts. The mixer should be cleaned well after every use.

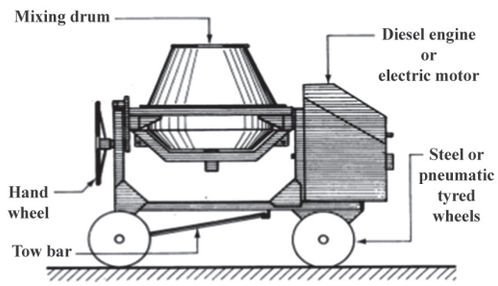



Typical (one bag) tilting drum concrete mixer

**ACTIVITY 4**

Visit a construction site in your town during the process of concreting by machine mixing and prepare a report with picture.


### 4.3.5.3 Ready Mix Concrete

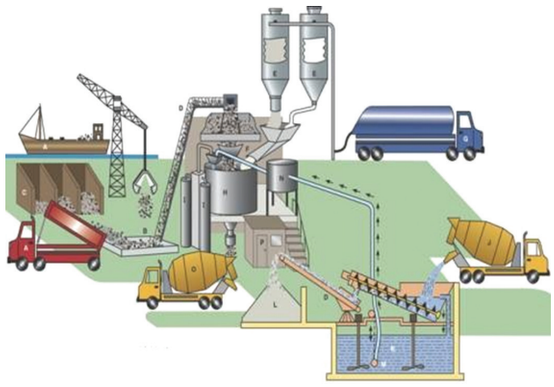



**Batching Plant**

When construction is to be carried out in congested places, it is difficult to find space for storing aggregates and mixing concrete at the site. Hence, ready mix concrete are used at such sites. The ready mix plants are located away from the centre of city where concrete can be mixed by using batching plants.

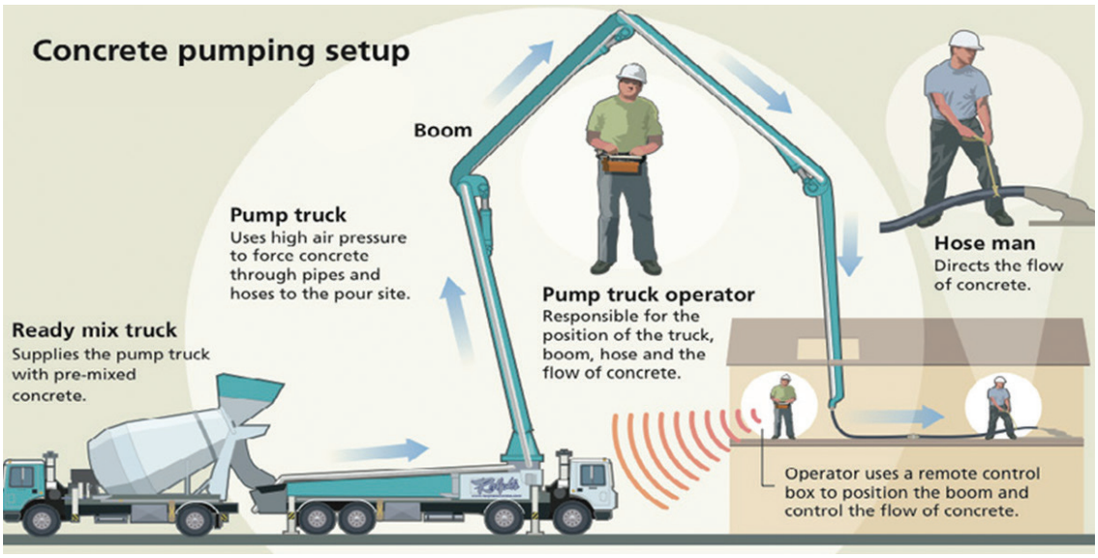




Civil_English_Unit_4.indd 93 12/21/2019 2:47:49 PM