DO YOU KNOW?

A 10- storey precasted structure was erected in 48 hours in Mohali, Chandigarh by involving 200 workers including technicians.



### 4.3.12 Precautions to Be taken During Transportation and Placing of Concrete

#### During Transportation

- There should be no segregation or spilling of concrete.
- Water should not be added in any circumstances.
- Concrete should be placed and compacted before its setting starts.


#### During Placing

- The form work should be properly cleaned and prepared well to receive fresh concrete.
- It should be deposited as nearly as possible to its final position.
- The position of form work and reinforcement should not be disturbed.
- It should not be dropped from height more than a metre to avoid segregation.
- It should be laid continuously.
- The thickness should not be more than 30-45cm in case of mass concrete and 15 - 30 cm in case of RCC Works.
- It should be consolidated or compacted well.
- Walking on freshly laid concrete should be avoided.
- Concrete should not be laid during rain.

DO YOU KNOW?

**Stephen Stepanian:**

An American inventor and owner of numerous patents including the elevator and conveyor, compound tool and the wrench. He is also the inventor of self-discharging motorized transit mixer that was the predecessor of the concrete mixer truck. Stepanian is often called the 'father of the ready-mix concrete' industry

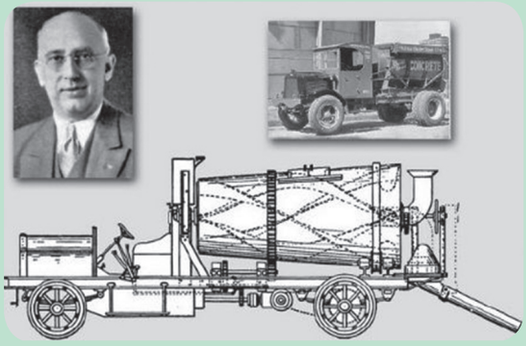



Civil_English_Unit_4.indd 99 12/21/2019 2:47:51 PM