The deepest foundation.

'Petronas tower' also known as Petronas Twin Towers became the structure having the deepest seated foundation in the world. It is situated in Kuala Lumpur, Malaysia.

- The whole foundation rested on 104 piles.
- To reach the safe bed rock, the piles were extended to the depth ranging from 200 to 374 feet.
- The piles were embedded by thick raft of 15 feet in depth.
- The concrete raft foundation, comprising 4,70,000 cubic feet of concrete was continuously powered through a period of 54 hours for each tower.

It takes 12 months to complete the foundation.

Search link: http://en.m.wikipedia.org>wiki>petronas tower





ACTIVITY 2

Prepare a report about deepest foundation structure with pictures.

xi. Now, the half of the width of the foundation should be marked on either sides of the centreline using white powder.

xii. Thus a building is set out at site for excavation.

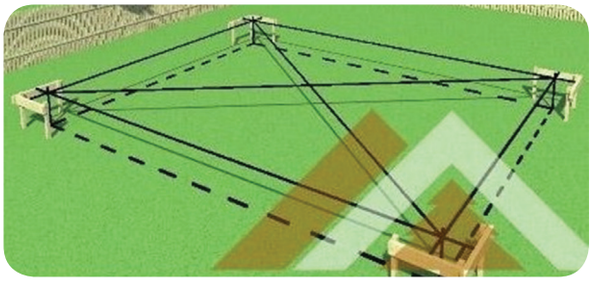

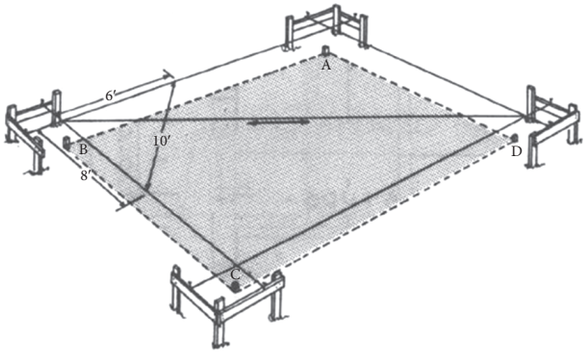

6.1.7 Causes of Failure of Foundation and Its Remedies

Causes:

1. Unequal settlement of the sub soil.
2. Unequal settlement of the masonry.
3. Withdrawal of moisture from the sub soil.
4. Lateral pressure of the super structure.
5. Horizontal movement of the earth.
6. Transpiration of trees and shrubs.
7. Atmospheric action.

Civil_English_Unit_6.indd 131 12/21/2019 4:39:50 PM