
ACTIVITY 3

Collect pictures of different types of roof and prepare an album.

The designs of steel trusses become simple because steel can take both compression and tension. A few types of steel trusses are shown in the figure.

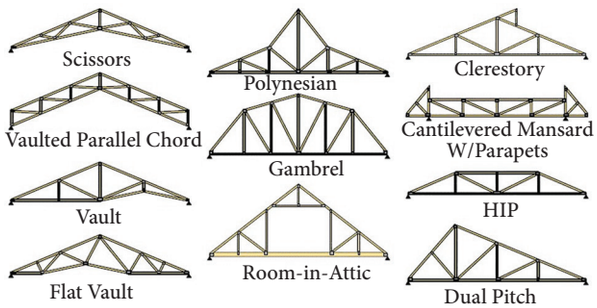

8.2.3.2 Flat Roof

The roof which is nearly flat or at a slope upto 10° is known as flat roof.

Types of Flat Roof

1. RCC roof
2. Madras terrace roof

1. RCC Roof

The following steps are to be adopted in the construction of Reinforced Cement Concrete (RCC) roof slab:



i) **Centering**

As the concrete is in semisolid state during placing, it is necessary to give support until it gains sufficient strength. This temporary supports which are formed by using wooden planks and props or steel plates and steel pipes is called Centering. It should be strong enough to withstand the weight of the roof concrete. Before laying the steel rods on the surface of centering, waste oil should be applied for easy removal of planks. The steel rods are then placed in position and are tied by using binding wires. Usually the concrete mix proportion of 1:1.5:3 is placed over the centering and they are compacted by using vibrator.



ii) Curing and Removal of Form Work

After laying of concrete, the surface of concrete should be cured for about 21 to 28 days. Only then, the concrete will attain its full strength. The form work can be removed after 14 days.



Civil_English_Unit_8.indd 184 12/21/2019 5:25:16 PM