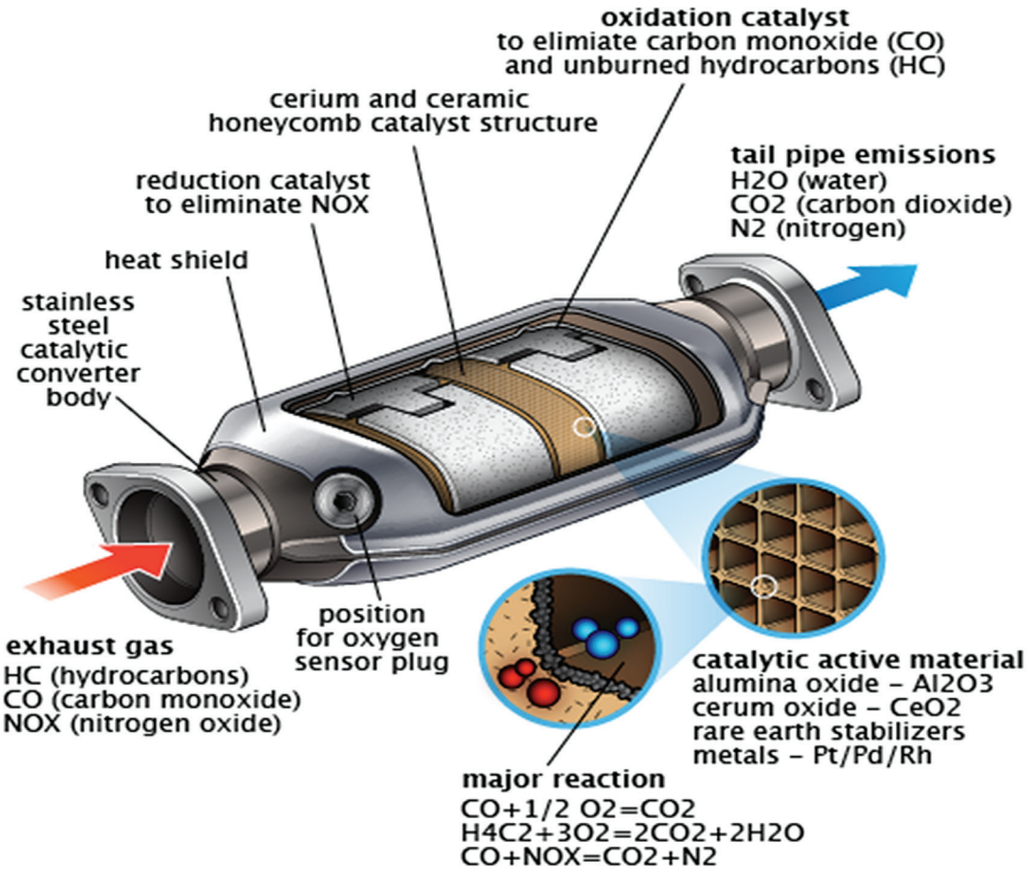


Figure 6.13 Catalytic Convertors

(1) Air inlet and exhaust system

- The Air filter should be cleaned
- The air inlet manifold should be cleaned
- Pre cleaner should be cleaned
- The crank case ventilation should be checked
- Exhaust system and muffler should be tested

(2) Engine testing

- The intake manifold of the system should be tested.
- Should check the air bubbles on the radiator.
- In the cylinder head gasket leakage should be tested
- Cylinder head bolts should be tightened well
- Have to check the valve clearance
- Have to check pressure of all the cylinder

(3) Ignition system testing

- The Spark plug should be cleaned
- Connection to the ignition coil should be tested
- Distributor cap and rotor should be checked
- The Condenser should be tested
- Ignition timing should be adjusted correctly

(4) Fuel system testing

- The leak (or) block in the fuel line should be tested

AM_Unit_06.indd 134 31-01-2019 17:49:24